Stainless410 with Saima Super Passivation

410 SSP-1000
Self Drilling Screw

410 Stainless Steel : 1,000h Salt Spray Test.

HIGH SPEED & HIGH QUALITY

SAIMA CORPORATION

410 SSP-1000
Self Drilling Screw

Stainless410 with Saima Super Passivation

SSP-1000 Self Drilling screws have application provides 1,000hours of Salt Spray Test.

< Salt spray test:JIS Z2371 >

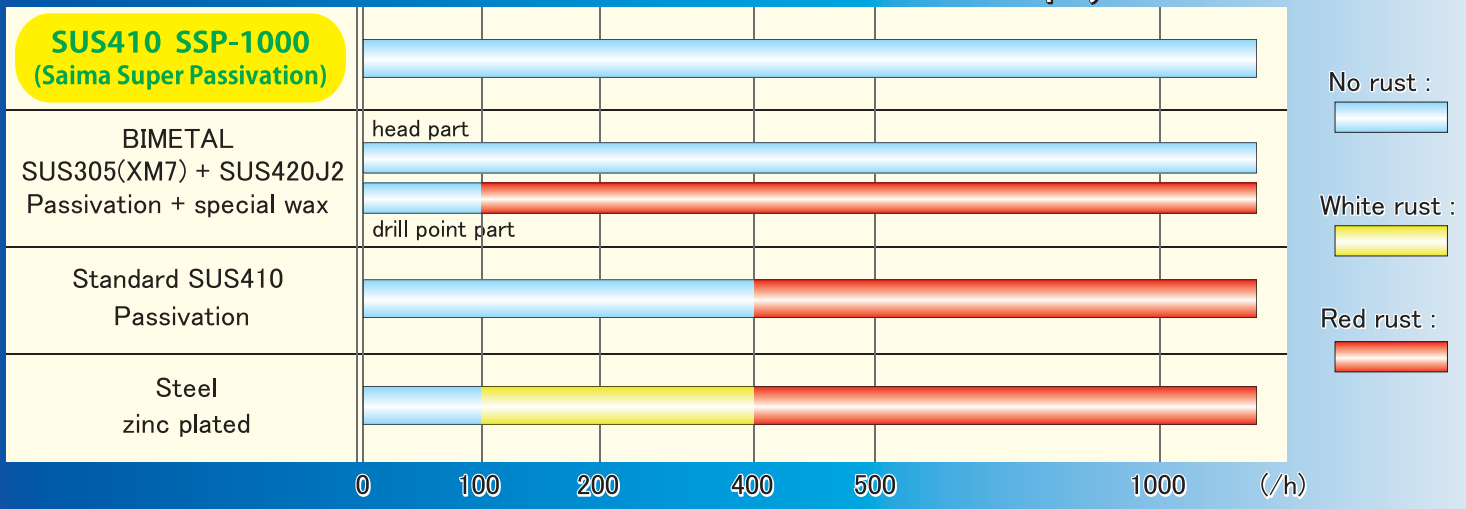

	100h.	200h.	400h.	1000h.
SUS410 SSP-1000 (Saima Super Passivation)				
BIMETAL SUS305(XM7) + SUS420J2 Passivation + special wax				
Standard SUS410 Passivation				
Steel zinc plated				

No rust , 1,000 hours!!

410SSP-1000 Self Drilling Screw

Cross recess Pan head



SIZE		Panel Thickness		dk		k		Box q'ty /pcs
3.5x9.5	#6x3/8	0.9–2.3mm	0.0354″–0.0905″	6.7mm	0.2638″	2.5mm	0.0984″	2,000
13	1/2							1,000
16	5/8							1,000
19	3/4							1,000
4.2x9.5	#8x3/8	0.9–2.3mm	0.0354″–0.0905″	8.0mm	0.3150″	3.0mm	0.1181″	1,000
13	1/2	1.5–3.2mm	0.0590″–0.1259″	8.0mm	0.3150″	3.0mm	0.1181″	1,000
16	5/8							1,000
19	3/4							1,000
25	1							500
30	1–3/16							500
35	1–3/8							400
40	1–5/8							400
45	1–3/4							300
50	2							300
55	2–3/16							250
60	2–3/8							250
70	2–3/4							150
4.8x13	#10x1/2	1.6–4.0	0.0629″–0.1574″	9.3mm	0.3661″	3.2mm	0.1260″	500
16	5/8							500
19	3/4							500
25	1							500
30	1–3/4							300
35	1–3/8							300
40	1–5/8							300
45	1–3/4							250
50	2							250
60	2–3/8							150

Cross recess Flat head



SIZE		Panel Thickness		dk		k		Box q'ty /pcs
3.5x9.5	#6x3/8	0.9–1.6mm	0.0354″–0.0629″	6.7mm	0.2638″	2.5mm	0.0984″	2,000
13	1/2	0.9–2.3mm	0.0354″–0.0905″	6.7mm	0.2638″	2.5mm	0.0984″	1,000
16	5/8							1,000
19	3/4							1,000
4.2x9.5	#8x3/8	0.9–1.6mm	0.0354″–0.0629″	8.0mm	0.3150″	3.0mm	0.1181″	1,000
13	1/2	1.5–3.2mm	0.0590″–0.1259″	8.0mm	0.3150″	3.0mm	0.1181″	1,000
16	5/8							1,000
19	3/4							1,000
25	1							500
30	1–3/16							500
35	1–3/8							400
40	1–5/8							400
45	1–3/4							300
50	2							300
60	2–3/8							250
4.8x16	#10x5/8	1.6–4.0mm	0.0629″–0.1574″	10.0mm	0.3937″	3.3mm	0.1299″	500
19	3/4							500
25	1							500
30	1–3/16							300
35	1–3/8							300
40	1–5/8							300
45	1–3/4							250
50	2							250
60	2–3/8							150

Hex head



SIZE		Panel Thickness		dk		k		Box q'ty /pcs
4.8x16	#10x5/8	2.8–4.5mm	0.1102″–0.1771″	10.5mm	0.4134″	4.5mm	0.1772″	500
19	3/4							500
25	1							500
35	1–3/8							300
40	1–5/8							250
45	1–3/4							250
50	2							200
60	2–3/8							150
70	2–3/4							150
6.3x19	#14x3/4	2.8–6.0mm	0.1102″–0.2362″	13.0mm	0.5118″	6.0mm	0.2362″	300
25	1							250
30	1–3/16							200
35	1–3/8							200
40	1–5/8							150
45	1–3/4							150
50	2							100
60	2–3/8							100
70	2–3/4							80
90	3–1/2							50
105	4–1/8							200
115	4–1/2							150
135	5–5/16							150

Cross recess Thinwasher head



SIZE		Panel Thickness		dk		k		Box q'ty /pcs
4.2x13	#8x1/2	1.5–3.2mm	0.0590″–0.1259″	11.0mm	0.4331″	2.5mm	0.0984″	1000
16	5/8							1000
19	3/4							700
25	1							500
30	1–3/16							400
35	1–3/8							400
40	1–5/8							300
50	2							250
4.8x19	#10x3/4	1.5–3.2mm	0.0590″–0.1259″	12.5mm	0.4921″	3.5mm	0.1378″	500
25	1							400
35	1–3/8							300
45	1–3/4							200
50	2							200
60	2–3/8							150
70	2–3/4							100
80	3–5/32							100
100	4							100

Cross recess Bugle head Drywall



SIZE		Panel Thickness		dk		Box q'ty /pcs
2.9x19	#4x3/4	thin steel plate max1.0mm	thin steel plate max 0.0393″	7.0mm	0.2756″	2,000
3.5x22	#6x7/8					1,000
25	1					1,000
32	1–1/4			7.5mm	0.2953″	1,000
41	1–5/8					500

Cross recess Flex head with wings



SIZE		Panel Thickness		dk		k		Box q'ty /pcs
4.2x28	#8x1-7/64	1.5–3.0mm	0.0590″–0.1181″	7.0mm	0.2756″	2.3mm	0.0906″	500
32	1–1/4							500
37	1–1/2							400
45	1–3/4							300
50	2							300
4.8x45	#10x1-3/4	1.5–4.0mm	0.0590″–0.1574″	9.5mm	0.3740″	3.3mm	0.1299″	200
60	2–3/8							150
70	2–3/4							150

Cross recess Flat head Drywall



SIZE		Panel Thickness		dk		Box q'ty /pcs
2.9x19	#4x3/4	thin steel plate max1.0mm	thin steel plate max 0.0393″	7.0mm	0.2756″	2,000
3.5x22	#6x7/8					1,000
25	1					1,000
32	1–1/4					1,000
41	1–5/8					500



Prompt shipment from our stock with Small Box q'ty!

HIGH SPEED & HIGH QUALITY
SAIMA CORPORATION

410SSP-1000 Self Drilling Screw

Cross recess
Flat small head (D=6)
Suitable for Aluminum window frame.



SIZE		Panel Thickness		dk		k		Box q'ty /pcs
4.2x9.5	#8x3/8	0.9–2.1mm	0.0354″–0.0826″	6.0mm	0.2362″	1.6mm	0.0630″	2,000
13	1/2	1.5–2.8mm	0.0590″–0.1102″	6.0mm	0.2362″	1.6mm	0.0630″	1,000
16	5/8							1,000
19	3/4							1,000
25	1							500
30	1–3/16							500
35	1–3/8							500
40	1–5/8							500

Cross recess
Flat small head (D=6)
Machine screw thread
Suitable for Aluminum window frame.



SIZE	Panel Thickness		dk		k		Box q'ty /pcs
M4x9.5	0.9–2.1mm	0.0354″–0.0826″	6.0mm	0.2362″	1.6mm	0.0630″	2,000
13	1.5–2.8mm	0.0590″–0.1102″	6.0mm	0.2362″	1.6mm	0.0630″	1,000
16							1,000
19							1,000
25							500

Cross recess
Pan small head (D=6)
Machine screw thread
Suitable for Aluminum window frame.



SIZE	Panel Thickness		dk		k		Box q'ty /pcs
M4x9.5	1.5–2.8mm	0.0590″–0.1102″	8.0mm	0.3150″	3.0mm	0.1181″	2,000
13							1,000
16							1,000
19							1,000
25							500
30							500

Cross recess
Pan head
for Concrete



SIZE		dk		D		Box q'ty /pcs
4.2x25	#8x1	8.0mm	0.3150″	3.4mm	0.1339″	200
32	1–1/4					200
4.8x25	#10x1	9.0mm	0.3543″	4.3mm	0.1693″	200
35	1–3/8					200

Cross recess
Flat head
for Concrete



SIZE		dk		D		Box q'ty /pcs
4.2x25	#8x1	7.0mm	0.2756″	3.4mm	0.1339″	200
32	1–1/4					200
4.8x25	#10x1	10.0mm	0.3937″	4.3mm	0.1693″	100
35	1–3/8					80

Cross recess
Pan head
Quadrex



SIZE		Panel Thickness		dk		k		Box q'ty /pcs
4.2x13	#8x1/2	1.5–3.2mm	0.0590″–0.1259″	8.0mm	0.3150″	3.0mm	0.1181″	1,000
16	5/8							1,000
19	3/4							1,000
25	1							500

Cross recess
Flat head
Quadrex



SIZE		Panel Thickness		dk		k		Box q'ty /pcs
4.2x13	#8x1/2	1.5–3.2mm	0.0590″–0.1259″	8.0mm	0.3150″	3.0mm	0.1181″	1,000
16	5/8							1,000
19	3/4							1,000
25	1							500

Prompt shipment from our stock with Small Box q'ty!

HIGH SPEED & HIGH QUALITY

SAIMA CORPORATION

2-9-17 Tsujido, Fujisawa, Kanagawa, 251-0047, Japan

Office : China・Malaysia・Singapore・Vietnam

☎ +81-466-36-3656 info@saima.co.jp

FAX +81-466-36-0009 www.saima.co.jp

ISO9001

ISO14001

2009.Feb.